

FISHER INTERNAL VALVES & ACCESSORIES

Threaded Internal Valves



While their most frequent use is the liquid and vapor openings of bobtail and transport trucks, the valves can also be used in stationary storage tanks, complying with NFPA No. 58 requirements for protection of transfer hose or piping at bulk plants.

DESCRIPTION	KIT NUMBER	LIST PRICES
Repair Kit for C40710	RC4071	44.67
Repair Kit for 2" MNPT	RC4001	79.42
Repair Kit for 3" MNPT	RC4002	101.94

TANK CONN.	OUTLET CONN.	U.L. RATED CLOSING FLOW GPM PROPANE	TANK COUPLING	VAPOR CAPACITY SCFH @ 100 PSIG INLET	TYPE NUMBER			LIST PRICES
					Straight Through Body (1 outlet)	Tee Body (2 outlets)	Strainer Body (3 outlets)	
1-1/4" MNPT	1-1/4" FNPT	30, 50 or 80	Half	13, 200w/50gpm spring	C40710	—	—	356.76
					C42716	—	—	943.36
2" MNPT	2" FNPT	100, 150 or 250	Half	54, 500 with 150gpm spring	—	C42116	—	1185.42
					—	—	C40216	2594.20
3" MNPT	3" FNPT	150, 200, 250 or 400 or 500	Half	75, 400 with 200gpm spring	C42724	—	—	1073.24
					—	C42124	—	1578.54
—	—	—	—	—	—	C40224	2919.66	

Flanged Internal Valves



Flanged valves provide a sturdy and compact means of direct pump or piping connection. #Closing flow vertical down. Contact factory for flows in horizontal position, vertical up or with screen removed.

DESCRIPTION	KIT NUMBER	LIST PRICES
Repair Kit for C40324	RC4032	178.56
Repair Kit for C40424	RC4042	175.00

TANK CONNECTION	OUTLET CONNECTION	U.L. RATED CLOSING FLOW GPM PROPANE	VAPOR CAPACITY SCFH @ 100 PSIG INLET	MEANS OF ACTUATION	TYPE NUMBER		LIST PRICES
					Single Flange Body	Double Flange Body	
3" 300lb. ANSI RF Modified Flange (4-5/8" dia. bore)	3" 300lb. ANSI RFFlange	150, 200, 250 or 400	64, 100 with 200gpm spring	Manual, Cable or Air	C40424	—	2432.04
					—	C40324	2715.96
4" 300lb. ANSI RF Modified Flange (5-7/8" dia. bore)	4" 300lb. ANSI RFFlange	# 340, 400, 600 or 800 or 1000	108, 600 with 400gpm spring	Cable Control	C40432	—	2562.40
					Air	C404A32	—
—	—	—	—	Manual	C404M32	—	2869.44

Cable Controls



Safety Shutdown




Type P134 Fusible Link is thermally disconnected at 212 degrees thus allowing closure of the internal valve.

DESCRIPTION	TYPE NUMBER	LIST PRICES
Cable Control	P650	290.00
Auxiliary Release (25FT)	P163A	210.38
Auxiliary Release (50FT)	P164A	245.68
Fusible Link	P134	8.80

DESCRIPTION	TYPE NUMBER	LIST PRICES
Pneumatic Operator with Bracket	AA9	244.00

Latch and Remote Releases

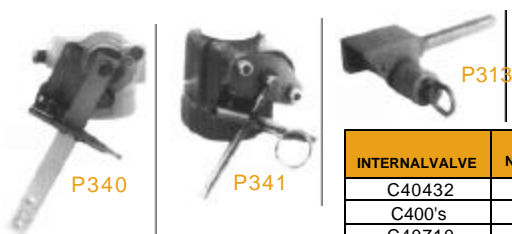

Air Cylinders



INTERNAL VALVE	TYPE NUMBER	LIST PRICES
C40432	P313	327.18
C400's	P340	92.66
C40710	P341	69.90
C40710 (Dual)	P342	74.24

INTERNAL VALVE	TYPE NUMBER	LIST PRICES
C402, C421 or C427	P3266	444.76
C40324	P3265	471.40
C40424	P3267	447.14
C40432	P312	721.32
C40710	P389	128.66