

SHERWOOD CYLINDER VALVES - DOT up to 40 lbs. Propane

Cylinder Valve 3349 Series



3349375

Inlet: 3/4"-14NGT.
Outlet: Internally threaded, F.POL
Externally threaded, 1-5/16" male Acme.
This valve is specially designed for use with the Marshall Brass Quick-Connect Coupling.

INLET CONNECTION	INTERNAL OUTLET CONNECTION	EXTERNAL OUTLET CONNECTION	FIXED LIQUID LEVEL	TYPE NUMBER	LIST PRICES
3/4" NPT	F.POL	1-5/16"	No	3349375	14.22
3/4" NPT	F.POL	1-5/16"	Yes	3349LG40	14.60

ACME Appliance Side and Fill Fittings



G185A02 and G185A03 - Simple to use with wrenchless, familiar right hand thread. Protects against uncontrolled fires with its thermally sensitive leeve and flow-limiting device.

G1850 - When the G1850 is threaded on and the valve's handle is turned to the "Open" position, the cylinder can be evacuated of its pressurized shipping air.

G820 - The ACME fill fitting threads directly onto the exterior 1-5/16" ACME threads on the Type cylinder valve with a smooth right hand motion. Once connected, the cylinder can be filled quickly and easily.



G1853A02

G1850

G820

DESCRIPTION	SIZE	MATERIAL	TYPE NUMBER	LIST PRICES
0-70,000 BTU Appliance side fitting	1-5/16" F. Acme x 1/4" MP	Black Nut Plastic	G1853A02	6.50
71,000-200,000 BTU Appliance side fitting	1-5/16" F. Acme x 1/4" MP	Green Nut Plastic	G1853A03	7.00
Evacuation Fitting	1-5/16" F. Acme x Tube	Plastic	G1850	5.38
Filler Fitting	1-5/16" F. Acme x 1/4" MP	Brass	G820	61.84

SHERWOOD CYLINDER VALVES - DOT up to 100 lbs. Propane

Cylinder Valve



Inlet: 3/4"-14NGT.
Outlet: F.POL This valve is used primarily on DOT cylinders with LP-Gas capacities up to 100 pounds. It features an integral relief device with a start to discharge pressure of 375 psig.

3250AT - Available with 1/4" NPT tapped inlet for tube.

INLET CONNECTION	OUTLET CONNECTION	FIXED LIQUID LEVEL	START TO DISCHARGE SETTING	TYPE NUMBER	LIST PRICES
3/4" NPT	F.POL	No	375	3250A375	16.96

Cylinder Valve



Inlet: 3/4"-14NGT.
Outlet: F.POL This valve is the same as the 3250A but with a fixed liquid level gauge. Specify the length. Available with relief device setting 405 psig. P/N 3250ALG405

INLET CONN.	OUTLET CONN.	FIXED LIQUID LEVEL	START TO DISCHARGE SETTING	TYPE NUMBER	LIST PRICES
3/4" NPT	F.POL	Yes	375	3250ALG375	17.82


Cylinder Valve



Inlet: 3/4"-14NGT.
Outlet: F.POL This valve is used where a separate safety relief is provided.

INLET CONNECTION	OUTLET CONNECTION	FIXED LIQUID LEVEL	TYPE NUMBER	LIST PRICES
3/4" NPT	F.POL	No	3250AD7	16.38

Liquid Withdrawal Valve

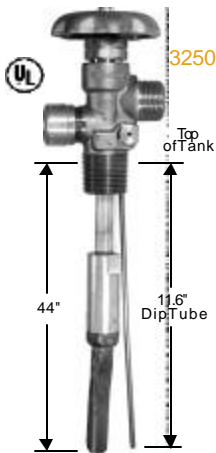

3250ALM375

This valve is the basic O-ring valve for use on cylinders of 100 lb. capacity where liquid withdrawal is required. This safety relief device is set to relieve at 375 psig. This valve incorporates a fixed liquid level gauge. The gauge enables the operator to determine the proper filling level as permitted by Pamphlet #58. An integral excess flow check valve provides extra safety.

INLET CONNECTION	OUTLET CONNECTION	FIXED LIQUID LEVEL	START TO DISCHARGE SETTING	TYPE NUMBER	LIST PRICES
3/4" NPT	.903-14 LH Male CGA555	Yes	375 psig	3250ALM375	66.94

Cylinder Valve



Inlet: 3/4"-14NGT.
Outlet: F.POL This valve contains a fixed liquid level gauge and is used where a separate safety relief is provided. (Example: used on multiport 420# cylinder).

INLET CONNECTION	OUTLET CONNECTION	FIXED LIQUID LEVEL	TYPE NUMBER	LIST PRICES
3/4" NPT	F.POL	Yes	3250ALGT11	27.08

SECTION A SHERWOOD CYLINDER VALVES - DOT up to 40 and 100 lbs. Propane