

## SHERWOOD SERVICE and QUICK ACTING VALVES

SECTION A SHERWOOD SERVICE and QUICK ACTING VALVES


### Inline OPD Valves



The inline OPD allows quick purging of new cylinders, has high BTU output flow (1.9 million BTU/Hr) at 100psi, it's easy to install and it's more durable - no float arm that can be damaged during installation or transport.

CYLINDER SIZE	CYLINDER D (in.)	REC. DIP TUBE LENGTH (in.)	TYPE NUMBER	LIST PRICES
10#	12.0	3.6	OPD10	23.54
20#	12.0	4.0	OPD20	20.34
30#	12.0	4.8	OPD30	24.62
40#	12.0	6.5	OPD40	24.62

### Service Valve, ASME, Engine Fuel

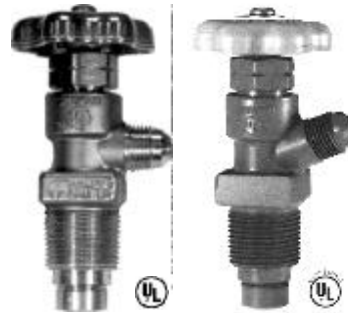

Excess flow check at inlet. Designed for withdrawal of liquid from engine fuel containers that have a separate relief valve. The angle SAE outlet permits the use of shorter couplings, lower hoods and easier connection of flare nuts.

INLET CONNECTION	OUTLET CONNECTION	EXCESS FLOW	HYDROSTATIC RELIEF	TYPE NUMBER	LIST PRICES
3/4" NPT	3/8" SAE	1.7 GPM	No	1447B	20.46
3/4" NPT	3/8" SAE	1.7 GPM	No	1447BMF	24.44

### Service Valve, ASME, Engine Fuel (Low Profile)



Excess flow check at inlet. Designed for withdrawal of liquid or vapor from motor fuel containers that have a separate relief valve. Contact your Meeder sales man about replacement bonnet assemblies.

INLET CONNECTION	OUTLET CONNECTION	EXCESS FLOW	HYDROSTATIC RELIEF	TYPE NUMBER	LIST PRICES
3/4" NPT	3/8" SAE	1.7 GPM	No	1447C	22.62

### Service Valve, ASME, Engine Fuel



Excess flow check at inlet. Designed for withdrawal of liquid or vapor from engine fuel containers. This valve contains an integral hydrostatic relief following trapped line pressure to prevent back to tank.

INLET CONNECTION	OUTLET CONNECTION	EXCESS FLOW	HYDROSTATIC RELIEF	TYPE NUMBER	LIST PRICES
3/4" NPT	3/8" SAE	1.7 GPM	Yes	1447D	31.86

### Components for DOT Fork Lift Application



1427C

Excess flow check at inlet. Specially designed for withdrawal of filling of lift truck cylinders. Valve permits the withdrawal of either liquid or vapor. The 1427B excepts smaller bonnet assembly and lower profile.

INLET CONNECTION	OUTLET CONNECTION	EXCESS FLOW	HYDROSTATIC RELIEF	TYPE NUMBER	LIST PRICES
3/4" NPT	3/8" NPT	1.7 GPM	No	1427B	16.02
3/4" NPT	3/8" NPT	1.7 GPM	No	1427C	14.68


### 440 Quick Acting Valve



Connects to end of hose used to fill the cylinder. Quickly turns on or shuts off the flow of liquid to the cylinder. Available with or without a locking device (locking handle on 440L Series only).

INLET CONNECTION	OUTLET CONNECTION	TYPE NUMBER		LIST PRICES
		w/LOCK	w/o LOCK	
1/4" FNPT	1/4" FNPT	440L	—	94.82
1/4" FNPT	1/4" FNPT	—	440	56.96
3/8" FNPT	3/8" FNPT	440AL	—	66.34
3/8" FNPT	3/8" FNPT	—	440A	63.50
1/2" FNPT	1/4" FNPT	440BL	—	94.82
1/2" FNPT	1/4" FNPT	—	440B	56.98
1/2" FNPT	1/2" FNPT	440CL	—	94.82
1/2" FNPT	1/2" FNPT	—	440C	56.96

### Combo Valve Multiple Head Units

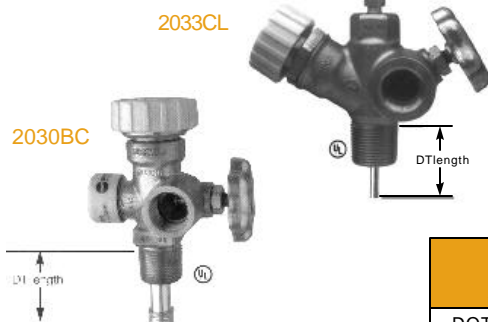

2033CL

2030BC

The 2033CL DB incorporates a Dual Bonnet, one piece bonnet and stem assembly for easy repair while the valve is fully open, so gas service is not interrupted.

CONTAINER CONNECTION	VAPOR SERVICE CONNECTION	VAPOR LINE CONNECTION	GAUGE BOSS	Gauge Boss Plugged	TYPE NUMBER	LIST PRICES
3/4" FNPT	Female POL	1-1/4" M. Acme	1/4" FNPT	Yes	2033CL	47.12
3/4" FNPT	Female POL	1-1/4" M. Acme	1/4" FNPT	Yes	2033CLDB	5.60

Multi-purpose valve with double back check fill valve, ideal for on-site filling of DOT cylinders up to 200 lbs. LP-Gas capacity without interrupting service.

APPLICATION	CYLINDER CONNECTION	VAPOR SERVICE CONNECTION	FILLER VALVE LINE CONNECTION	Fixed Liquid Level Gauge	Relief Valve Start-to-Discharge Setting	TYPE NUMBER	LIST PRICES
DOT Cylinders up to 200 lbs. Propane Cap.	3/4" MNGT	Female POL	1-3/4" M. Acme	Yes	375 psig	2030BC	44.88