

**PUMPS**

www.BLACKMER.com

**2" & 3" Pumps-Double Ended Shaft**



These rugged pumps are ideal for bulk plant service, multiple cylinder filling applications, vaporizers, bobtails and transports.

DESCRIPTION	CAPACITY RANGE (GPM)	PUMP SPEED (RPM)	DELIVERY IN GPM			PART NUMBER	LIST PRICES
			50 PSI DIFF	100 PSI DIFF	HP REQ.		
2" Foot Mounted	23 to 67	660	67	57	LGLD2	2294.00	
3" Foot Mounted	42 to 133	640	133	112	LGLD3	3356.00	

**4" Pump-Double Ended Shaft**



The LGLD4 pump series is suitable for handling both LP-Gas and anhydrous ammonia. These models are used in bulk plant applications where high transfer rates are desirable.

DESCRIPTION	CAPACITY RANGE (GPM)	PUMP SPEED (RPM)	DELIVERY IN GPM			PART NUMBER	LIST PRICES
			50 PSI DIFF	100 PSI DIFF	HP REQ.		
4" Foot Mounted	90 to 270	640	270	220	LGLD4	5016.00	
		520	220	180			
		420	170	130			
		330	130	90			


**3" Truck Pump**



This series pump flange-mounts directly to the truck tank in combination with the flanged internal control valve. Because it eliminates the intake line and related restriction to flow, it also eliminates the cavitation problems caused by them. That means longer pump life and higher effective pump capacity.

DESCRIPTION	CAPACITY RANGE (GPM)	PUMP SPEED (RPM)	DELIVERY IN GPM			PART NUMBER	LIST PRICES
			50 PSI DIFF	HP REQ.	100 PSI DIFF		
3" Flange Mounted	40 to 93	650	93	5.0	81	TLGLF3	3040.00
		600	85	4.5	73		
		500	70	3.6	59		
		400	52	2.8	40		

**2' & 3" Pump Assemblies with Base Mounting**

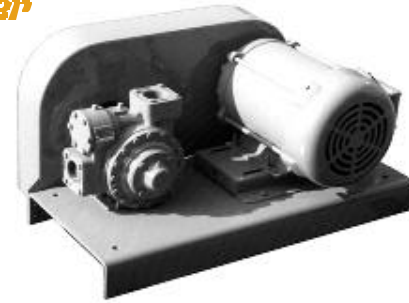

These units have high-torque V-belts and quick disconnect sheaves. Units come complete with belt guard, pump mounted to base plate, and mounted to standard motor.

DESCRIPTION	RECOMMENDED MOTOR SIZE	PUMP SPEED (RPM) w/1750 RPM MOTOR	Delivery in GPM		PART NUMBER	LIST PRICES
			50 PSI DIFF	100 PSI DIFF		
2" Base Mounted with V-Belt Drive	7.5 HP	660	67	57	3LGLD2VB7.5	4540.00
		520	50	41		
	5 HP	420	40	30	3LGLD2VB5	4260.00
		330	30	23		
3" Base Mounted with V-Belt Drive	15 HP	640	133	112	3LGLD3VB15	6340.00
		520	108	84		
	10 HP	420	80	60	3LGLD3VB10	5480.00
		330	59	42		

**4" Pump Assemblies with Base Mounting**



These pump units have high-torque V-belts and quick disconnect sheaves. Sheaves and hubs are two part assemblies that come apart easily. Units come complete with belt guard, pump mounted to base plate, and mounted to standard motor.

DESCRIPTION	RECOMMENDED MOTOR SIZE	PUMP SPEED (RPM) w/1750 RPM MOTOR	Delivery in GPM		PART NUMBER	LIST PRICES
			50 PSI DIFF	100 PSI DIFF		
4" Base Mounted with V-Belt Drive	20 HP	640	270	220	3LGLD4VB20	8680.00
		520	220	180		
	15 HP	420	170	130	3LGLD4VB15	8120.00
		330	130	90		

**4" Truck Pump**



The TLGLF4A series transport pump is designed to mount to 4" internal valves. It is suitable for both LP-Gas and anhydrous ammonia service. Ideal intake conditions assure maximum pumping rates and the shortest possible transport turnaround time.

DESCRIPTION	CAPACITY RANGE (GPM)	PUMP SPEED (RPM)	DELIVERY IN GPM			PART NUMBER	LIST PRICES
			50 PSI DIFF	HP REQ.	100 PSI DIFF		
4" Flange Mounted	120 to 280	650	280	15.5	245	TLGLF4A	5226.00
		600	260	14.3	220		
		500	210	11.9	170		
		400	160	9.5	120		