

HOSE and HOSE COUPLINGS

LPGHose



MAX.WP	SIZE I.D.	SIZE O.D.	PART NUMBER	LIST PRICES
125	3/8"	5/8"	522	1.44
350	1/4"	5/8"	540	1.52

Dayco High Pressure LPGHose



MAX.WP	SIZE I.D.	SIZE O.D.	PART NUMBER	LIST PRICES
350	1/4"	5/8"	740	1.20
350	3/8"	25/32"	742	2.38
350	1/2"	31/32"	743	3.64
350	3/4"	1-1/4"	744	4.92
350	1"	1-1/2"	745	5.92
350	1-1/4"	1-27/32"	746	13.40
350	1-1/2"	2-1/8"	750D	19.20
350	2"	2-9/16"	751	25.60

Hose Couplings



Part No. 745 available in lengths of: 100', 125' & 150' For high pressure hose couplings see page 15.



ME316220



ME316232B

Stainless Steel Reinforced Hose



MAX.WP	SIZE I.D.	SIZE O.D.	PART NUMBER	LIST PRICES
350	3/4"	1-5/16"	564	38.56
350	1"	1-5/8"	565	48.92
350	1-1/4"	1-15/16"	566	53.52
350	1-1/2"	2-5/32"	567	68.82
350	2"	2-3/4"	568	97.68

COUPLING STYLE	MATERIAL	SIZE	HOSE I.D.	APPROX. HOSE I.D.	TYPE NUMBER	LIST PRICES
Clamp Type Standard Outlet	Steel	1/2" MNPT	1/2"	15/16"	ME316208	22.00
		3/4" MNPT	3/4"	1-1/4"	ME316212	26.50
		1" MNPT	1"	1-1/2"	ME316216	38.80
		1-1/4" MNPT	1-1/4"	2"	ME316220	63.00
		1-1/2" MNPT	1-1/2"	2-1/4"	ME316224	77.20
		2" MNPT	2"	2-3/4"	ME316232	84.40
Clamp Type Swivel Nut Outlet	Steel	3-1/4" F. Acme	2"	2-3/4"	ME316232S	172.60
	Brass	3-1/4" F. Acme	2"	2-3/4"	ME316232B	174.20
	Steel	4-1/4" F. Acme	3"	3-3/4"	ME316248S	265.50
	Steel	4-1/4" F. Acme	3"	3-3/4"	ME316248S	265.50

High Pressure Fuel Line Hose, U.L. Approved



MAX.WP	SIZE I.D.	SIZE O.D.	PART NUMBER	LIST PRICES
350	3/8"	21/32"	SS06	2.82

Dayco Pressed on Hose Couplings




Installed one end.

NOTE: All in Hose Assemblies are hydrostatically tested and date stamped on coupling. A hose test report filed and copy sent to the customer.

THREAD SIZE	HOSE I.D.	NUMBER HOSE	PART NUMBER	LIST PRICES
3/8" MNPT	3/8"	542	NP06	12.08
1/2" MNPT	1/2"	543	NP08	18.52
3/4" MNPT	3/4"	544	NP12	21.38
1" MNPT	1"	545	NP16	29.50
1-1/4" MNPT	1-1/4"	546	NP20	45.94
1-1/2" MNPT	1-1/2"	550	NP24	118.92
2" MNPT	2"	551	NP32	167.98

Style "QW" Reusable Couplings for Wire Braid Hose ONLY

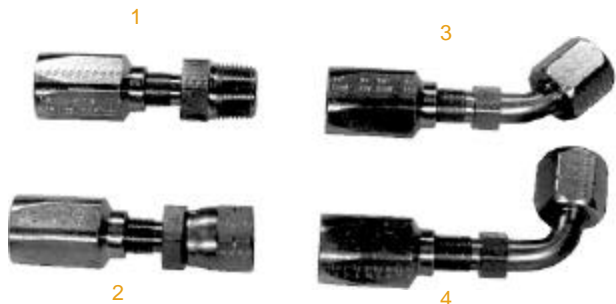

Style "QW" Reusable Couplings are high quality steel constructed. Easily installed on SS06, QW and ALW style hoses only.

TYPE CONN.	THREAD SIZE	HOSE I.D.	REF. NO.	PART NUMBER	LIST PRICES
Male NPT	1/4"	3/16"	1	4QW4MD	3.28
	1/4"	5/16"		6QW4MD	3.72
	3/8"	5/16"		6QW6MD	4.12
	1/2"	13/32"		8QW8MD	6.21
	3/4"	5/8"		12QW12MD	10.14
	1"	7/8"		16QW16MD	15.16
	1-1/4"	1-1/8"		20QW20MD	19.26
	1-1/2"	1-3/8"		24QW24MD	30.18
	2"	1-13/16"		32QW32MD	36.10
Swivel Female SAE Flare	1/4"	3/16"	2	4QW4FZD	2.28
	3/8"	5/16"		6QW6FZD	4.11
	1/2"	13/32"		8QW8FZD	5.76
	3/4"	5/8"		12QW12FZD	13.23
Swivel Female SAE Flare (Angled)	1/4"	3/16"	3	4QW454FZD	6.60
	1/4"	3/16"	4	4QW904FZD	7.46
	3/8"	5/16"	3	6QW456FZD	11.46
	3/8"	5/16"	4	6QW906FZD	9.60

Hold-Fast Reusable Couplings



Hold-Fast Reusable Couplings are for general low pressure service.

TYPE CONN.	THREAD SIZE	HOSE I.D.	REF. NO.	PART NUMBER	LIST PRICES
Swivel Female SAE Flare	1/4"	1/4"	5	4PFZB	1.50
	3/8"	3/8"		6PFZB	2.14
	1/2"	1/2"		8PFZB	3.82
Male NPT	1/4"	1/4"	6	4PMB	1.66
	3/8"	3/8"		6PMB	1.50
	1/2"	1/2"		8PMB	3.54
	1/4"	3/8"		64PMB	1.66