

MISCELLANEOUS SHERWOOD VALVES and ADAPTERS


Plumber's Pot Valve/OPD



Functions as a shutoff, control, pressure relief valve and adapter to attach a standard plumber's cylinder mounted furnace. Compact size for easy fit with cylinder collars. Provided with an integral excess flow valve. Closing flow is approximately 200 CFH LP-Gas.

INLET CONNECTION	OUTLET CONNECTION	FIXED LIQUID LEVEL	START TO DISCHARGE SETTING	Excess Flow	TYPE NUMBER	LIST PRICES
3/4" NPT	POL	Yes	375	Yes	3359PDLG	98.44

Unloading Adapter

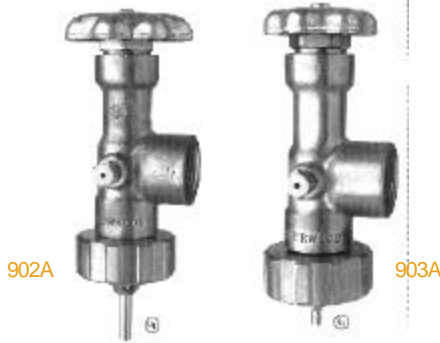

The 902A is used to remove liquid from older domestic tanks where the 1-3/4" fill valve is attached to a tube that allows withdrawal of liquid from the bottom of the tank.

The 903A is used when liquid has to be removed from a tank during an emergency or when relocation is necessary.

FILLER VALVE CONNECTION	OUTLET CONNECTION	STEM LENGTH	TYPE NUMBER	LIST PRICES
1-3/4" F. Acme	3/4" FNPT	Long	902A	84.04
1-3/4" F. Acme	3/4" FNPT	Short	903A	78.36


Full Internal Pressure Relief Valves for DOT Forklift Cylinders and Adapters



Used on forklift trucks and other power units with removable DOT cylinders with up to 100 lbs. LP-Gas capacity.

CONTAINER CONNECTION	START-TO-DISCHARGE SETTING	FLOW CAPACITY SCFM AIR		TANK SURFACE AREA (SQ. FT.)		PIPEAWAY ADAPTER	TYPE NUMBER	LIST PRICES
		UL	ASME	U L	ASME			
3/4"	375 PSIG	517	--	17	--	43545/43590	435A	11.92
3/4"	375 PSIG	517	--	17	--	43545/43590	435L	36.40

Full Internal Pressure Relief Valves and Pipeaway Adapters

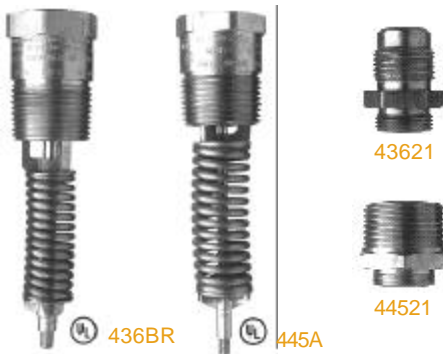

The 445A Series is used as a pressure relief device on large ASME engine fuel containers and recreational vehicle containers. 445A is used on multiport 420 lb. DOT containers.

The 436A Series is used as a pressure relief device on smaller ASME engine fuel containers and recreational vehicle containers. Allow the use of a smaller more economical 3/4" NPT tank couplings.

CONTAINER CONNECTION	START-TO-DISCHARGE SETTING	FLOW CAPACITY SCFM AIR		TANK SURFACE AREA (SQ. FT.)		PIPEAWAY ADAPTER	TYPE NUMBER	LIST PRICES
		UL	ASME	UL	ASME			
1"	250 PSIG	987	950	35	33	44521	445AM	24.48
1"	312 PSIG	1300	1175	49	43	44521	445AR	24.48
1"	375 PSIG	1625	--	64	--	44521	445AT	24.06
3/4"	312 PSIG	720	679	23	22	43621	436BR	24.66

3865 Hydrostatic Valve



Supplied with 1/4" MNPT. This new hydrostatic relief valve is designed primarily for use in manifolds and carburetion systems.

START TO DISCHARGE SETTING	TYPE NUMBER	LIST PRICES
400	3865	7.54